


Model: CZL601AC

Type: single point load cell
Material: aluminum alloy
Surface: anodized treatment
Protection: IP65
Suggested Platform Size: 350 ×350 mm
Application: retail, bench and counting scales

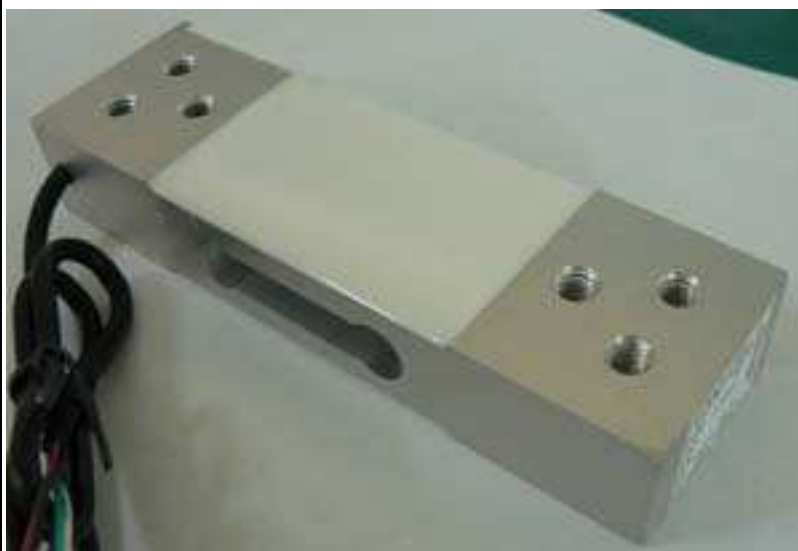

1. Rated Load	10-120 (Kg)
2. Rated Output	2.0mV/V±5%
3. Zero Balance	±1%F.S
4. Input Resistance	400±10Ω
5. Output Resistance	350±3Ω
6. Excitation Voltage	9-12VDC
7. Nonlinearity	0.02%F.S
8. Hysteresis	0.02%F.S
9. Repeatability	0.02%F.S
10. Creep(30min)	0.02%F.S
11. Operating Temperature	-20℃ To +65℃
12. Temperature Effect on Zero	0.03%F.S/10℃
13. Temperature Effect on Span	0.02%F.S/10℃
14. Insulation Resistance	5000MΩ(50VDC)
15. Safe Overload	150%F.S
16. Ultimate Overload	200%FS
17. Cable	420mm(Φ3mm 4-wire shielding cable)

Dimensions:

