


### Overview




- |  |  |
|--|--|
| 1. Optional 2 MP Webcam                                      | 14. Hard drive activity / HP 3D DriveGuard LED indicator |
| 2. Volume mute button with LED indicator                     | 15. Battery charging LED indicator                       |
| 3. Volume up/down buttons with LED indicators                | 16. Power/standby LED indicator                          |
| 4. RJ-11/modem port  | 17. Wireless on/off LED indicator                        |
| 5. RJ-45/Ethernet port                                       | 18. Power button with LED indicator                      |
| 6. eSATA/USB 2.0 Combo port                                  | 19. HP QuickLook 3 button with LED indicator             |
| 7. Upgrade Bay (optical drive, 2nd hard drive, weight saver) | 20. HP QuickWeb button with LED indicator                |
| 8. Integrated Smart Card Reader                              | 21. Wireless on/off button with LED indicator            |
| 9. Optional HP Fingerprint Sensor                            | 22. Touchpad on/off button                               |

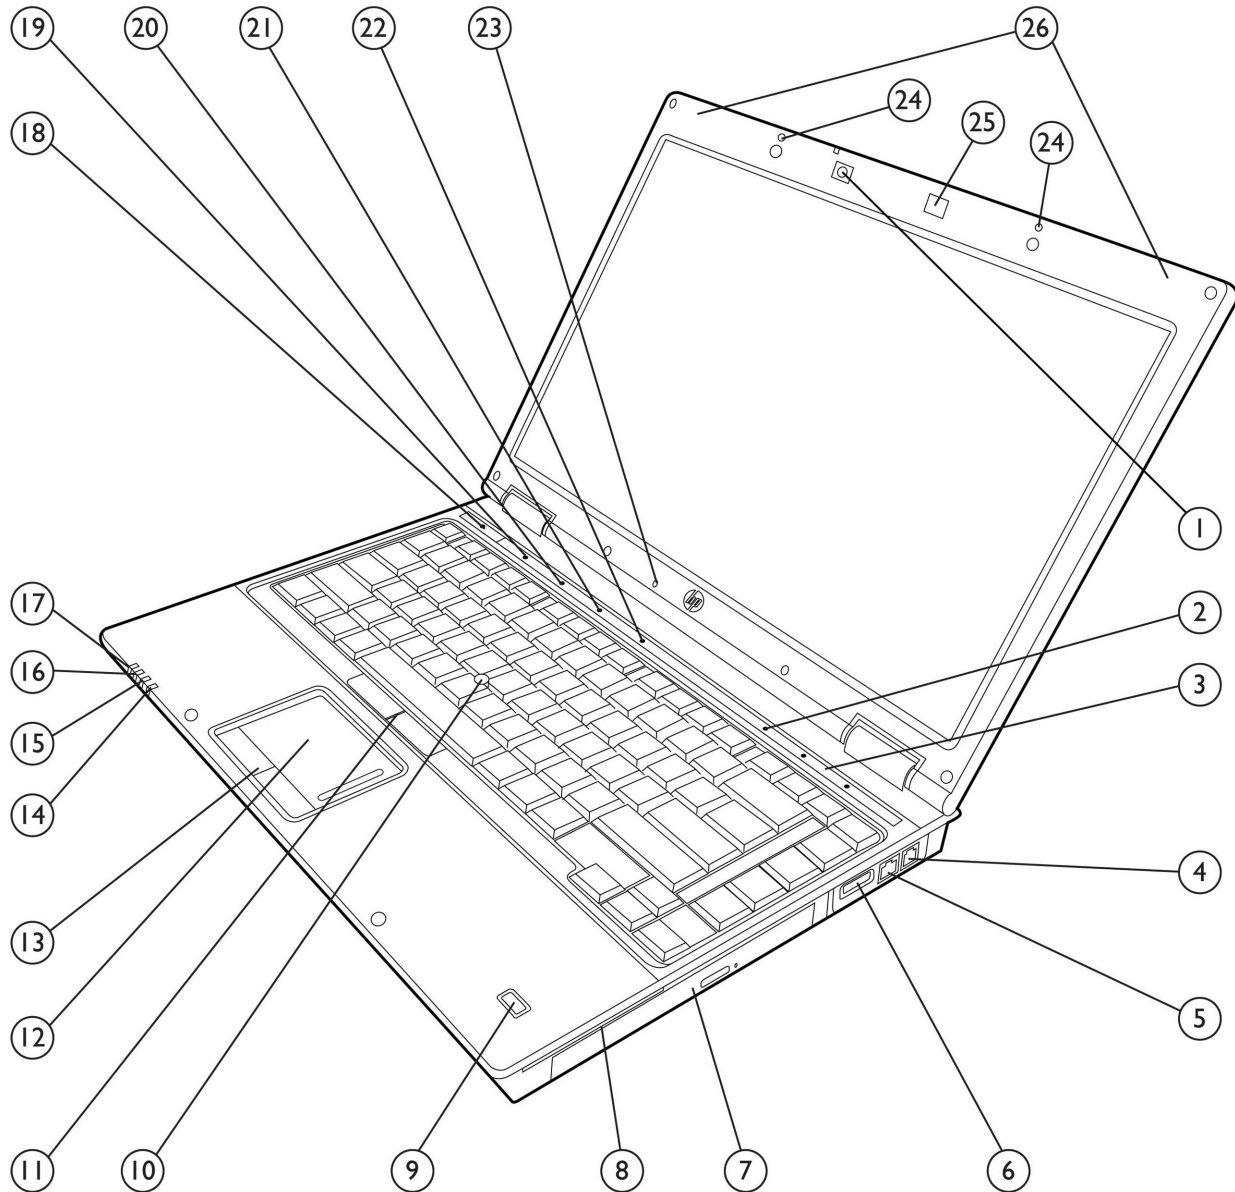

### Overview

10. Pointstick
11. Pointstick buttons
12. Touchpad with scroll zone
13. Touchpad buttons


23. Ambient Light Sensor
24. Dual-microphone array
25. HP NightLight with on/off button
26. WLAN and WWAN antennas

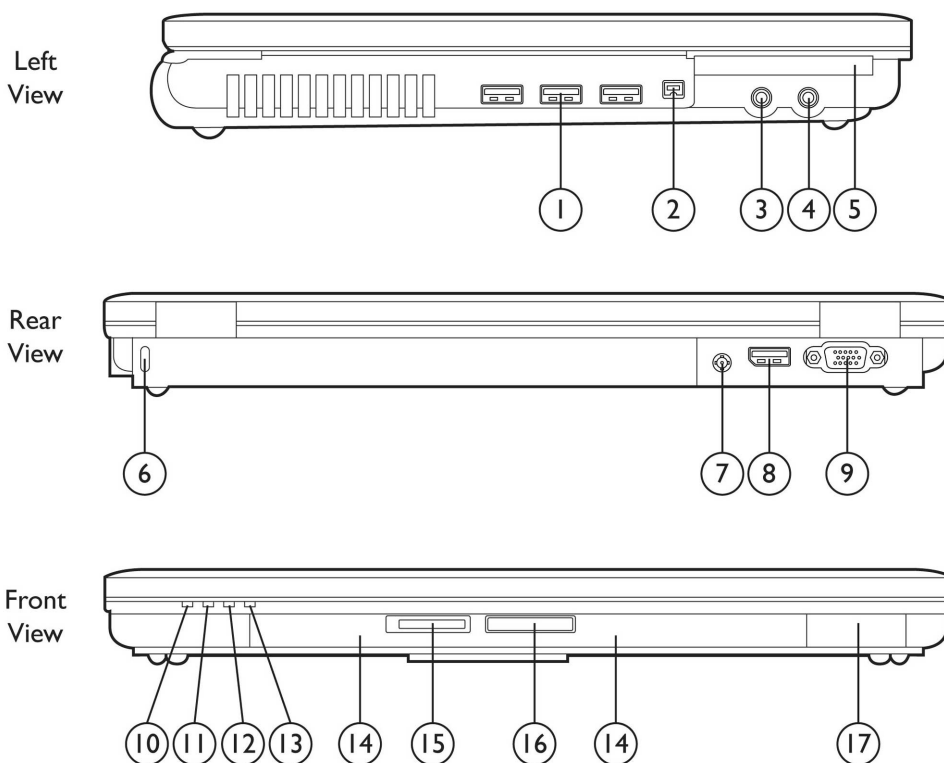

1. (3) USB 2.0 ports
2. 1394a port
3. Stereo microphone in
4. Stereo headphone/line out
5. ExpressCard/54 slot
6. Kensington Lock slot
7. Power connector
8. DisplayPort
9. VGA connector (external monitor/projector)

10. Wireless on/off LED indicator
11. Power/standby LED indicator
12. Battery charging LED indicator
13. Hard drive activity / HP 3D DriveGuard LED
14. Integrated stereo speakers
15. Secure Digital (SD) slot
16. Display release latch
17. Bluetooth module compartment

## Overview

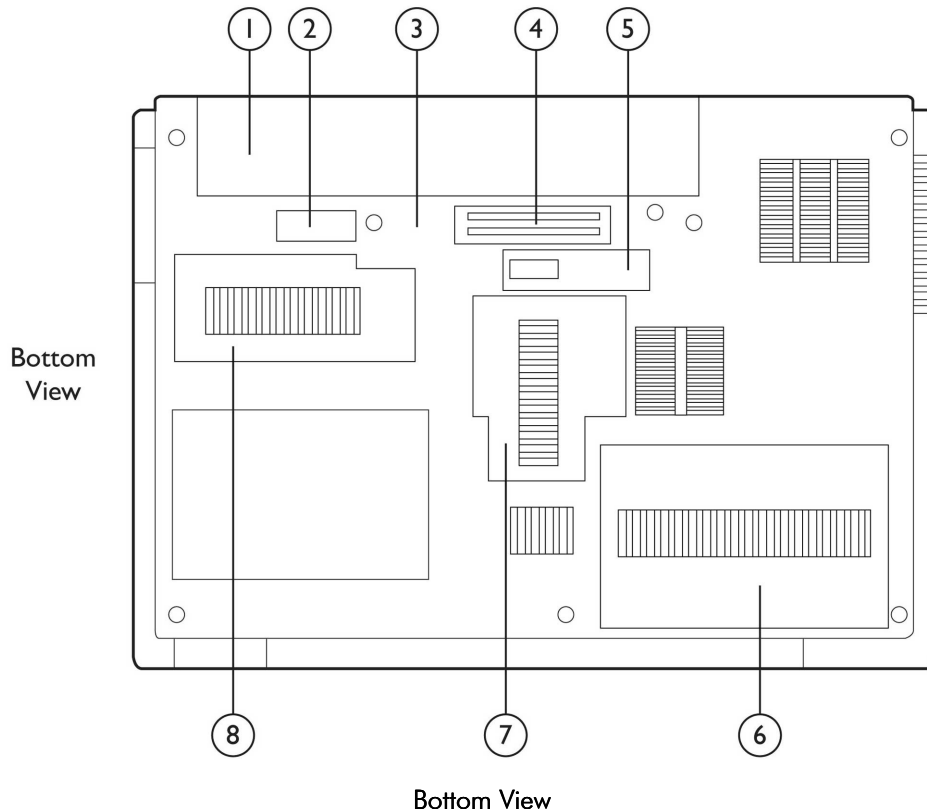

Bottom View

- |   |                                 |
|---|---------------------------------|
| 1. Battery bay  | 5. Secondary battery connector  |
| 2. Battery release latch                                  | 6. Hard drive bay               |
| 3. SIM slot for WWAN (select models) – inside battery bay | 7. Memory module compartment    |
| 4. Docking connector                                      | 8. WLAN/WWAN module compartment |

## At A Glance

- Genuine Windows 7 versions or FreeDOS
- NVIDIA NVS 3100M graphics with 512 MB dedicated memory or Intel Graphics Media Accelerator HD graphics
- Intel® Core™ i7 or Core i5 processor with Intel Turbo Boost Technology
- DisplayPort for external monitors, and eSATA/USB 2.0 Combo port for external storage
- Industrial, business rugged construction features a full magnesium alloy chassis, magnesium/aluminum display enclosure, metal alloy hinges, brushed aluminum with platinum finish; designed to meet the military standard Mil-Std-810G for vibration, dust, humidity, altitude, and high and low temperature operation\*
- Widescreen 14.0-inch diagonal 16:9 LED-backlit HD or HD+ display with Ambient Light Sensor and optional HP Privacy Filter
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- Touch-sensitive controls for HP QuickLook 3 (instant access to email, calendar, contacts and tasks), HP QuickWeb, wireless on/off, mute, volume down, volume up
- Choice of 4-cell, 6-cell, 9-cell, or HP Long Life primary battery, plus optional external batteries - HP Ultra-Capacity Battery, HP Extended Life Battery
- Choice of 7200 rpm user-removable hard drive up to 500 GB with HP 3D DriveGuard protection, or 160/256 GB Solid State Drive
- Flexible wireless connectivity options:
  - Integrated HP un2420 EV-DO/HSPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology with GPS



### Overview

- Integrated Intel Centrino® Ultimate-N / Advanced-N 6000 Series 802.11 a/b/g/n wireless LAN module; or Broadcom b/g or a/b/g/n wireless LAN module
- Bluetooth® v2.1
- Optional 2 MP Webcam, HP Night Light
- Enhanced security features including integrated Smart Card Reader, HP ProtectTools, Computrace LoJack Pro ready, HP SpareKey, HP Disk Sanitizer, TPM 1.2 ;\*\* optional HP Fingerprint Sensor, and optional HP Privacy Filter
- Upgrade Bay for easy optical drive upgrade or optional second hard drive for RAID 1 Mirroring or RAID 0 Striping
- Dual pointing devices (touchpad with scroll zone and pointstick)
- ExpressCard/54 slot, Secure Digital (SD) slot

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* TPM module disabled where not permitted by law (for example, Russia and China).



## Standard Features

### Processors

#### Intel Quad-Core Processor (models with discrete graphics only)

Intel Core i7-740QM Processor (1.73 GHz, 6 MB L3 cache)\*

Up to 2.93 GHz with Intel Turbo Boost Technology

Intel Core i7-720QM Processor (1.60 GHz, 6 MB L3 cache)\*

Up to 2.8 GHz with Intel Turbo Boost Technology

#### Intel Dual-Core Processors

Intel Core i7-640M Processor (2.80 GHz, 4 MB L3 cache)\*

Up to 3.46 GHz with Intel Turbo Boost Technology

Intel Core i7-620M Processor (2.66 GHz, 4 MB L3 cache)\*

Up to 3.33 GHz with Intel Turbo Boost Technology

Intel Core i5-580M Processor (2.66 GHz, 3 MB L3 cache)\*

Up to 3.33 GHz with Intel Turbo Boost Technology

Intel Core i5-560M Processor (2.66 GHz, 3 MB L3 cache)\*

Up to 3.20 GHz with Intel Turbo Boost Technology

Intel Core i5-540M Processor (2.53 GHz, 3 MB L3 cache)\*

Up to 3.06 GHz with Intel Turbo Boost Technology

Intel Core i5-520M Processor (2.4 GHz, 3 MB L3 cache)\*

Up to 2.93 GHz with Intel Turbo Boost Technology

\* Intel's numbering is not a measurement of higher performance.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

### Operating System

#### Preinstalled

Genuine Windows 7 Professional Edition 32\*

Genuine Windows 7 Professional Edition 64\*

Genuine Windows 7 Home Premium Edition 32\*

Genuine Windows 7 Home Premium Edition 64\*

FreeDOS

#### Supported

Genuine Windows Vista Enterprise 32\*\*

Genuine Windows Vista Enterprise 64\*\*

Genuine Windows Vista Business 64\*\*

Genuine Windows Vista Business 32\*\*

Genuine Windows Vista Home Basic 32\*\*

Genuine Windows XP Professional 64

#### Certified

SuSE Linux Enterprise Desktop 11

\* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

\*\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.



### Standard Features

#### Chipset

Mobile Intel QM57 Express Chipset

#### Intel Core i5 with vPro/Core i7 with vPro technology capable

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with an Intel Centrino® Ultimate-N/Advanced-N 6000 series WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 6.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE:** Some functionality of Intel Core i5 with vPro/Core i7 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel Core i5 with vPro/Core i7 with vPro technology is dependent on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

#### Graphics

Models with discrete graphics:

NVIDIA NVS 3100M graphics with 512 MB dedicated gDDR3 video memory  
Microsoft DirectX 10.1 (Shader Model 4.1)

Models with integrated graphics:

Intel Graphics Media Accelerator HD  
Microsoft DirectX 10 (Shader Model 4.0)

#### Display

##### Internal

14.0-inch diagonal 16:9 LED-backlit HD anti-glare (1366 x 768 resolution)  
14.0-inch diagonal 16:9 LED-backlit HD+ anti-glare (1600 x 900 resolution)  
Ambient Light Sensor  
Optional HP Privacy Filter

##### External

Up to 32-bit per pixel color depth  
**DisplayPort** supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz  
**VGA** port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz  
**DVI-D** (single link) video signal available through DVI port in optional HP Docking Station (sold separately)  
supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking  
**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.



### Standard Features

Memory	Standard	DDR3 PC3-10600 SDRAM (1333 MHz)* Two SODIMM slots supporting dual-channel memory 1024 MB, 2048 MB, 3072 MB, or 4096 MB
	Maximum	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

\* With some processors, memory bus runs at a maximum of 1066 MHz.  
**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Communications	Integrated Intel Gigabit Network Connection (10/100/1000 NIC)* 56K V.92 modem** <p>* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.</p> <p>** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.</p>
----------------	---

Wireless Devices	Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.
HP un2420 EV-DO/HSPA Mobile Broadband Module	Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications such as Computrace LoJack Pro Premium for HP ProtectTools. <b>NOTE:</b> Separately purchased mobile network operator service is required. Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
All 802.11 integrated wireless LAN options	Wi-Fi Certified* Cisco Compatible Extensions support Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support Three antennas integrated in the display enclosure
Intel Centrino Ultimate-N 6300 (3x3)	Integrated support for 802.11a, b, g, and n* 3 transmit, 3 receive antennas Up to 450 mbps data rate



### Standard Features

Intel Centrino Advanced-N 6200 (2x2)	Integrated support for 802.11 a, b, g, and n* 2 transmit, 2 receive antennas Up to 300 mbps data rate
Broadcom 4312G 802.11b/g WiFi Adapter	Integrated support for 802.11 b and g Up to 54 mbps data rate
Broadcom 43224AGN 802.11a/b/g/n WiFi Adapter	Integrated support for 802.11 a, b, g and n 2 transmit, 2 receive antennas Up to 300 mbps data rate
HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification v2.1 compliant Works with a wide range of Bluetooth devices

\* In countries where 802.11 n is not allowed, this capability is not enabled (802.11 a/b/g only).

### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. U.S. and International key layouts are available. Includes an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features. It has 19.05 x 19.05 mm key pitch (center-to-center spacing) and 2.5 mm stroke.

### Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: HP QuickLook 3, HP QuickWeb, wireless on/off, volume mute, volume down, volume up, touchpad on/off

### Dual Pointing devices

Touchpad with scroll zone, two pick buttons  
Pointstick with two additional pointstick buttons

### Expansion card slots

ExpressCard/54 slot	Supports ExpressCard/54
Integrated Smart Card Reader	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
Secure Digital slot	Supports SD (Secure Digital), MMC (MultiMedia Card)





### Standard Features

Internal Storage	Hard Drives	160/250/320/500 GB 7200 rpm SMART SATA II 320 GB 7200 rpm SMART SATA II Self Encrypting Drive
	<b>NOTE:</b> These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.	
	HP 3D DriveGuard (Windows only)	The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
	Solid State Drives	160 GB Solid State Drive 256 GB Solid State Drive
Upgrade Bay	Fixed 12.7 mm SATA optical drive	Blu-ray R/RE DVD+/-RW SuperMulti DL Drive Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive DVD+/-RW SuperMulti DL LightScribe Drive DVD-ROM Drive
	Second hard drive	500 GB 7200 rpm SMART SATA II Hard Drive
	Weight saver	
Interfaces	ExpressCard/54 slot	One
	External monitor	Two - (1) DisplayPort, (1) VGA
	Smart Card Reader	One
	1394a	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem	One
	RJ-45/Ethernet	One
	USB 2.0	Three
	eSATA/USB 2.0 Combo port	One
	Docking connector	One
	Secondary battery connector	One



### Standard Features

#### Audio/Visual

HD audio (HP Premier Sound)  
Integrated stereo speakers  
Integrated dual-microphone array  
Touch-sensitive controls for volume up, volume down, and mute  
Stereo headphone/line out  
Stereo microphone/line in

Optional 2 MP webcam

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- AutoMacro focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

#### Software

##### Preinstalled software with Windows operating system

HP Recovery Manager (available with Windows 7 or Vista only)  
HP Support Assistant (available with Windows 7 or Vista only)  
HP ProtectTools Security Manager  
HP QuickLaunch Buttons Software  
HP QuickLook 3  
HP QuickWeb  
HP Power Assistant  
HP Connection Manager  
HP Wireless Assistant  
Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)\*  
McAfee Total Protection\*\*  
PDF Complete SE\*\*\*  
Roxio Creator Business 10 (select models)  
InterVideo WinDVD (select models)  
Synaptics Touchpad Driver  
HP Webcam Software  
WinZip 14.5

##### Additional software available from the web

HP SoftPaq Download Manager  
HP Client Manager Software  
HP Client Management Solutions  
Java Card Security for HP ProtectTools

\* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

\*\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

\*\*\* 60 day trial; purchase license afterwards for full functionality.



### Standard Features

<b>HP Recovery Manager</b>	Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 15 GB of the hard drive is reserved for the system recovery software.
----------------------------	--

Security	Standard Features	HP ProtectTools Security Manager Enhanced Pre-Boot Security HP SpareKey One-Step Logon Setup Password DriveLock Password TPM 1.2 Embedded Security Chip* TPM Enhanced DriveLock* HP Disk Sanitizer Kensington Lock slot Support for Computrace** LoJack Pro for HP ProtectTools	
	Optional Features	HP Fingerprint Sensor	Enhanced sensor scans the fingerprint to uniquely identify and authenticate a person.
		HP Privacy Filter	Narrows viewing area so that screen data is visible only to persons directly in front of the monitor.
		Computrace** LoJack Pro Premium for HP ProtectTools with GPS Tracking	Subscription based security solution providing the ability to track, initiate physical recovery, conduct asset management, and perform remote data delete by utilizing GPS technology. GPS functionality requires HP un2420 EV-DO/HSPA Mobile Broadband Module.

\* TPM module disabled where use is restricted by law; for example, Russia and China.

\*\* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

<b>HP ProtectTools Security Manager</b>	HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:
---	--

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Java Card Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools



### Standard Features

#### Power Supply

Models with discrete graphics:  
External 90-watt Smart AC adapter  
Models with integrated graphics:  
External 65-watt Smart AC adapter

Power cord included is 6-foot (1.8 meter).  
Total length including external AC adapter is 12 feet (3.66 meter).  
HP Fast Charge\*

\*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the HP 9-cell Primary Battery, the HP Ultra-Capacity Battery, or the HP Long Life Battery.

#### Battery

**Primary battery**  
HP 9-cell 100 WHr Li-Ion Primary Battery  
HP 6-cell 55 WHr Li-Ion Primary Battery  
HP 4-cell 37 WHr Li-Ion Primary Battery  
HP Long Life 6-cell 51 WHr Li-Ion Primary Battery  
**Optional HP Long Life Battery\***  
HP Long Life Battery (3-cell 47 WHr)  
**Optional secondary battery**  
HP Extended Life Battery (8-cell 52 WHr)  
HP Ultra-Capacity Battery (12-cell 95 WHr)

\* The optional HP Long Life Battery takes the place of the primary battery, which must be removed.

#### Battery Life

	9-cell (100 WHr) Primary	6-cell (55 WHr) Primary	4-cell (37 WHr) Primary	HP Long Life 6-cell (51 WHr) Primary
Primary battery, hard drive	Up to 11 hours and 45 minutes	Up to 6 hours and 30 minutes	Up to 4 hours and 15 minutes	Up to 6 hours
Primary battery and optional HP Extended Life Battery, hard drive	Up to 18 hours and 30 minutes	Up to 12 hours and 15 minutes	*	*
Primary battery and optional HP Ultra-Capacity Battery, hard drive	Up to 23 hours	Up to 18 hours	*	*
Primary battery, optional HP Ultra-Capacity Battery, Solid State Drive	Up to 24 hours**	Up to 20 hours	*	*

**NOTE:** Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark [www.bapco.com/products/mobilemark2007](http://www.bapco.com/products/mobilemark2007) for additional details.

\* This configuration not tested for battery life.

\*\* Up to 24 hours requires HP EliteBook 8440p configured with Intel Graphics Media Accelerator HD, optional SSD, 9-cell primary battery and separately purchased Ultra Capacity Battery.



### Standard Features

**System Standby Time** Up to 1 week

---

**Power Conservation** Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)  
Intel Display Power Saving technology (models with integrated graphics)  
NVIDIA PowerMizer 7.0 technology (models with NVIDIA graphics)  
Hibernation  
Standby  
ACPI compliance

---

**Docking and Stands** HP Docking Station  
HP Advanced Docking Station  
HP USB 2.0 Docking Station  
HP Essential USB 2.0 Port Replicator  
HP Dual-Monitor Stand  
HP Monitor Stand  
HP Basic Adjustable Stand  
HP Adjustable Notebook Stand

**NOTE:** Some HP Docking stations may not support every feature of some HP Notebook models. Please refer to the individual docking station documentation for specific information about supported features.

---

**Service and Support** HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.  
**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.



### Options

**NOTE:** Options/capabilities listed in the QuickSpecs represent those capabilities available through Base Units or Build to Order configurations. The various product features and capabilities will vary in terms of configurable vs. aftermarket options (AMOs). There may be options and capabilities available through CTO that are not available as AMOs.

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA

Storage	HP Notebooks USB Diskette Drive	DC361B
	HP Upgrade Bay SATA DVD+/-RW SuperMulti DL LightScribe Drive	AK869AA
	HP 250GB Pocket Media Drive	FE477AA
	HP External USB Drive CD/DVD R/RW	FS943AA
	HP Upgrade Bay SATA 500 GB 7200 rpm Hard Drive	AU097AA
	HP Primary SATA 500 GB 7200 rpm Hard Drive	AU098AA
	HP Primary SATA 320 GB 7200 rpm Hard Drive	AS282AA
	HP Primary SATA 250 GB 5400 rpm Hard Drive	AK868AA

Expansion Solutions	HP Docking Station	VB041AA
	HP Advanced Docking Station	NZ222AA
	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Dual-Monitor Stand	AK084AA
	HP 2009 Monitor Stand	TBD
	HP 2009 Adjustable Notebook Stand	TBD
	HP Basic Adjustable Stand	AL549AA

Communications	Intel WLAN 802.11a/b/g/n Mini-card Option Kit	TBD
	HP un2420 EVDO/HSPA Mobile Broadband Module	WD301AA



### Options

Power	HP 1-Bay Battery Charging Station	RW635AA
	HP 5-Bay Battery Charging Station	RW636AA
	HP Battery Adapter Kit	KV829AA
	HP Smart 65W Travel AC Adapter	AU155AA
	HP 90W Smart AC Adapter	ED495AA
	HP 90W Smart Combo Adapter	AJ652AA
	HP 6-Cell Li-Ion Primary Battery	KU531AA
	HP 9-Cell Li-Ion Primary Battery	AT908AA
	HP Extended Life Battery	AJ359AA
	HP Ultra-Capacity Battery	AT486AA
	HP Long Life Battery	AU213AA
<hr/>		
Carrying Cases	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger Carrying Case	AP355AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Lady's Case	AT889AA
	HP Professional Series Slip Case	AT890AA
	HP Elite Series Lady's Case	AT891AA
	HP Merlot Slip Case	AU095AA
<hr/>		
Security	HP/Kensington MicroSaver Security Lock	PC766A
	HP 14.0-inch Display Privacy Filter	AU100AA
	HP ExpressCard Smart Card Reader	AJ451AA
<hr/>		
Input/Output Devices	HP PS/2 Keyboard & Mouse Bundle	RC464AA
	HP USB Keyboard & Mouse Bundle	RC465AA
	HP USB Optical Travel Mouse	RH304AA
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP Wireless Mouse	AR085AA
	HP BT Headset	AR084AA
	HP Mobile Audio Speakers	FS944AA



## Memory

DDR3 PC3-10600 SDRAM (1333 MHz)\*

Two SODIMM slots supporting dual-channel memory

SODIMM sizes supported: 1024 MB, 2048 MB, and 4096 MB

### Standard Memory

- 1024 MB (1024 MB x 1)
- 2048 MB (2048 MB x 1 or 1024 MB x 2)
- 3072 MB (2048 MB + 1024 MB)
- 4096 MB (4096 MB x 1 or 2048 MB x 2)

### Optional Memory Upgrades

Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user-accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
2048 MB	2048 MB	Empty
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	4096 MB	Empty
4096 MB	2048 MB	2048 MB
8192 MB	4096 MB	4096 MB

\* With some processors, memory bus runs at a maximum of 1066 MHz.

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP-branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

### Memory Upgrades

HP 1 GB (DDR3 1333 MHz) SODIMM

AT911AA

HP 2 GB (DDR3 1333 MHz) SODIMM

AT912AA

HP 4 GB (DDR3 1333 MHz) SODIMM

AT913AA





## Storage

### Upgrade Bay Drive Support

	Quantity Supported	Drive Bay
Blu-ray R/RE DVD+/-RW SuperMulti DL Drive	One	Upgrade Bay
Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive	One	Upgrade Bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Upgrade Bay
DVD-ROM Drive	One	Upgrade Bay
500 GB 7200 rpm SMART SATA II Hard Drive	One	Upgrade Bay
Weight Saver	One	Upgrade Bay

### Internal Storage Device

	Quantity Supported	Drive Bay
<b>Hard Drives</b>		
500 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Self Encrypting Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
<b>Solid State Drive</b>		
256 GB Solid State Drive	One	Dedicated hard drive bay
160 GB Solid State Drive	One	Dedicated hard drive bay



### Technical Specifications

System Unit	Dimensions (HxWxD)	1.23 in (at front) x 13.21 in x 9.3 in 31.3 mm (at front) x 335.6 mm x 236.2 mm
	Weight	Starting at 4.7 lb (2.12 kg) with weight saver (no optical drive) Starting at 5.0 lb (2.27 kg) with DVD-ROM drive
<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, hard drive, and WLAN.		
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	Discrete graphics: 22.5 W Integrated graphics: 14.5 W
	Max Operating Power	Discrete graphics: < 90 W Integrated graphics: < 65 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	−4° to 140° F (−20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	−50 to 10,000 ft (−15.24 to 3,048 m)
	Non-operating	−50 to 40,000 ft (−15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered TBD in United States**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KCC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes



### Technical Specifications

Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes
UKRSERTCOMPUTER	Yes

\* Configurations of the HP EliteBook 8440p that are ENERGY STAR qualified are identified as HP EliteBook 8440p ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT TBD Registered in U.S. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

#### HP 120W Smart AC Adapter

Weight	1.52 lb (0.69 kg) (adapter)	
	0.29 lb (0.13 kg) (power cord)	
Dimensions	6.65 x 2.56 x 1.50 in (16.9 x 6.5 x 3.8 cm)	
Input	Operating Input Voltage	100 to 240 VAC
	Operating Input Current	PFC Version:
		2.20 A at 90 VAC
		1.10 A at 180 VAC
		Non-PFC Version:
		2.5 A at 110 VAC
Output	1.25 A at 180 VAC	
	Operating Frequency Range	47 to 63 Hz AC
	Efficiency	83% minimum at 115 VAC
	Output power	120 W
	DC Output Voltage	18.5 V
	Environmental Design	Operating Temperature
Non-operating (storage) Temperature		-4° to 149° F (-20° to 65° C)
Altitude		0 to 10,000 ft (0 to 3,048 m)
Humidity		20% to 80%
Storage Humidity		10% to 90%
EMI and Safety Certifications		CE Mark: full compliance with LVD and EMC directives
	Worldwide safety standards: IEC60950, EN60950, UL60950, Class2, SELV	
	Agency approvals: C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE, S-Mark, Australian Electric Permit, PSB, eK, BSMI, BNCI, KONCAR, GS, GOST, SASO, SABS, UKRSERTCOMPUTER; MTBF- over 200,000 hours at 25°C ambient condition.	



### Technical Specifications

HP 90W Smart AC Adapter	Dimensions	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)	
	Weight	0.82 lb (370 g)	
	Input	100 to 240 VAC	
		Input Efficiency	83% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version
			2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
	Output	Output power	90W
		DC output	19.0V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class I, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.	

**NOTE:** Unless otherwise noted, temperature limits listed in the following component specifications relate to the internal temperatures of these components and not to the environment in which the PC is operating.

Optional HP Ultra-Capacity Battery	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Watt-hour Capacity	95 Wh
		Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
	Temperature	Non-operating	-4° to 140° F (-20° to 60° C)
		Battery Re-Charge Time	Smart Adapter
			3 to 4 hours
		System ON	4 to 5 hours (depending on system power consumption)
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	



### Technical Specifications

Optional HP Extended Life Battery		Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)
Battery	Weight		1.00 lb (0.455 kg)
	Cells/Type		8-cell Lithium-Ion
	Energy	Watt-hour Capacity	52 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF mode or Standby		3 hours
		System ON	3 to 5 hours (depending on system power consumption)
	HP Fast Charge Technology		Charges the battery up to 90% within 90 minutes when system is OFF
Fuel Gauge		When pressed, LEDs light indicating level of charge remaining on battery	

Optional HP Long Life Battery		Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.4 cm)
Battery	Weight		0.71 lb (0.32 kg)
	Cells/Type		3-cell Lithium-Ion
	Energy	Watt-hour Capacity	47 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF mode or Standby		2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
	HP Fast Charge Technology		Charges the battery up to 90% within 90 minutes when system is OFF

HP 9-Cell 100 Wh Lithium-Ion Primary battery		Dimensions (H x W x L)	0.75 x 3.0 x 8.0 in (2.0 x 7.5 x 20.5 cm)
Battery	Weight		1.1 lb (0.480 kg)
	Cells/Type		9-cell Lithium-Ion
	Energy	Watt-hour Capacity	100 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F (-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
Battery Re-Charge Time	System in OFF mode or Standby		3.5 to 5 hours
	System ON		4 to 7 hours (depending on system power consumption)



### Technical Specifications

6-Cell (55 Wh) Lithium-ion battery	Dimensions (HxWxL)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.4 cm)	
	Weight	0.71 lb (0.32 kg)	
	Cells/Type	6-cell Lithium-ion	
	Energy	Watt-hour Capacity	55 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

4-Cell (37 Wh) Lithium-ion battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.55 lb (0.249 kg)	
	Cells/Type	4-cell Lithium-ion	
	Energy	Watt-hour Capacity	37 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

HP Long Life 6-cell 51 Wh Lithium-ion Primary battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.73 lb (0.331 kg)	
	Cells/Type	6-cell Lithium-ion	
	Energy	Watt-hour Capacity	51 Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)



### Technical Specifications

#### Displays

14.0-inch LED HD (1366 x 768) anti-glare	Active Area (W x H)	12.74 x 7.56 in (32.4 x 19.2 cm)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.227 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	112 ppi	
	Viewing Angle	$\pm 30^\circ$ Horizontal, $\pm 10^\circ$ Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

14.0-inch LED HD+ (1600 x 900) anti-glare	Dimensions (W x H)	323.5 mm x 192.0 mm (typ)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300 (min)	
	Refresh Rate	60 Hz	
	Brightness	200 nits (typ)	
	Pixel Resolution	Pitch	0.1935mm
		Format	1600 x 900
		Configuration	RGB Strip
	Backlight	LED	
	PPI	131 ppi	
	Viewing Angle	30/30/20/10 (Left/Right/Down/Up) (minimum)	

#### Internal Storage



## Technical Specifications

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	





## Technical Specifications

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	250 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

256 GB 2.5-Inch SATA Solid State Drive	Weight	80.1 Grams	
	Capacity	256 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	SATA	
	Performance	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		220 MB/s	200 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7; SATA 2.6; DIPM	

160 GB 2.5-inch SATA Solid State Drive	Weight	78 Grams	
	Capacity	160 GB	
	Height	0.275 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	SATA	
	Performance	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>
		250 MB/s	70 MB/s
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7 ;SATA 2.6; DIPM	

## Optical Drives



### Technical Specifications

DVD-ROM Drive	Access Times	Random	< 110 ms CD (typical) < 110 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X-DVD	Up to 3,600 KB/s Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	
DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 150ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	Up to 3,600 KB/s
		8X DVD	Up to 10,800 KB/s
		24X CD-R	Up to 3,600 KB/s
		16X CD-RW	Up to 2,400 KB/s
		8X DVD+R	Up to 10,800 KB/s
		8X DVD+RW	Up to 10,800 KB/s
		8X DVD-R	Up to 10,800 KB/s
		6X DVD-RW	Up to 8100KB/s
		4X - DVD+R Dual Layer	Up to 5,400 KB/s
		4X - DVD-R Dual Layer	Up to 5,400 KB/s
		5X DVD-RAM	Up to 6,750 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	



## Technical Specifications

Blu-ray R/RE DVD+/-RW SuperMulti DL Drive	Access Times	Random	<140 ms CD-ROM (typical) <160 ms DVD-ROM (typical) <300 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 8X CD-R 8X CD-RW 8X DVD+R 4X DVD+RW 8X DVD-R 4X DVD-RW 2.4X DVD+R(9) 5X DVD-RAM 1X BD-ROM 1X BD-R 1X BD-RE	Up to 3,600 KB/s Up to 10,800 KB/s Up to 1,200 KB/s Up to 1,200 KB/s Up to 10,800 KB/s Up to 5,400 KB/s Up to 10,800 KB/s Up to 5,400 KB/s Up to 2,700 KB/s Up to 6,750 KB/s Up to 4,500 KB/s Up to 4,500 KB/s Up to 4,500 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM, BD-ROM, BD-R, BD-RE	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, BD-R, BD-RE	
	Max Media Capacity (read)	50.0 GB	
	Max Media Capacity (write)	50.0 GB	
	Transport	Tray Loading	



## Technical Specifications

Blu-ray ROM DVD +/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 190 ms CD-ROM (typical) < 190ms DVD-ROM (typical) < 230 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 16X CD-R 10X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 4X BD-ROM	Up to 3600 KB/s Up to 10800 KB/s Up to 1,200 KB/s Up to 1500 KB/s Up to 10800 KB/s Up to 10,800 KB/s Up to 10800 KB/s Up to 8,100 KB/s Up to 5400 KB/s Up to 6750 KB/s Up to 18,000 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM, BD-ROM, BD-R, BD-RE	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	50.0 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

## Security



### Technical Specifications

HP Fingerprint Sensor (optional)	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	32° - 158°F (0° - 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 ( $\pm 15$ KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

### Audio

Hardware	Implementation	IDT 92HD75B High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual-microphone array when equipped with optional webcam

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

### Communications



### Technical Specifications

<b>Integrated Intel Gigabit Network Connection</b> (10/100/1000 NIC)  82577LM	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	<b>Power Management</b>	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption
	<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable)
	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Intel Advanced Management Technology 6.0 (iAMT)
	<b>Interface</b>	PCI Express x1 based, SMBUS dedicated connection with Intel® 5 Series Chipset
	<b>NIC Device Driver Name</b>	Intel 82577 Gigabit Network Connection

<b>V.92 56K Data/Fax Modem</b>	<b>Form Factor</b>	MDC 1.5 Daughtercard
	<b>Power Management Support</b>	APM Revision 1.2, ACPI
	<b>Approvals/Certifications</b>	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	<b>Data Mode Capabilities</b>	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) <b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates <b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22



## Technical Specifications

	V.21
	Bell 212A
	Bell 103J
Fax Mode Capabilities	TIA/EIA-578-B (Class 1)
	T.30, T.4 (Group 3)
	V.17
	V.29
	V.27ter
	V.21 Channel 2
Command Set	V.250 (Partial)
	TIA-602
	Identification: +GMI, +GMM, +GMR
	Port control: +IPR, +ICF, +IFC, +ILRR
	Modulation: +MS, +MR, +MA
	Error control: +ES, +ER, +EB, +ESR, +ETBM
	Data compression: +DS, +DR
	V.251

HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) - 7.2 Mbps (Download ), 2.0Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
	GPS	Standalone GPS enabled
	GPS Bands	L1 - 1575.42 MHz
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
	Maximum Power Consumption	2500mA (peak); 1000mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface



## Technical Specifications

<b>Weight</b>	11.5 g
<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
<b>Voltage, Operating</b>	3.3v +/- 10%
<b>Temperature, Operating</b> (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
<b>Humidity, Non-operating</b>	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
<b>Configuration Utilities</b>	HP Connection Manager
<b>LED Activity</b>	LED Off - Radio Off; Solid LED On - Radio On

### Intel Centrino Ultimate-N 6300 Wireless LAN Standards

IEEE 802.11a  
IEEE 802.11b  
IEEE 802.11g  
IEEE 802.11n\*

\* In countries where 802.11n is not allowed, this capability is not enabled.

#### Interoperability

Wi-Fi certified (802.11bgn only)  
Cisco Compatible Extensions Program compliant (802.11bgn only) with Microsoft Windows Vista and XP

#### Frequency Band

2.4 GHz and 5GHz

#### Antenna Structure

3 transmit; 3 receive (3x3)

#### Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11b: 1, 2, 5.5, 11 Mbps  
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
802.11n: many possible data rates, ranging from 6 Mbps to 450 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification

#### Modulation

Direct Sequence Spread Spectrum  
DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM

#### Security<sup>1</sup>

Authentication: WPA and WPA2, 802.1x (EAP\_TLS, TTLS, PEAP, LEAP, EAP-FAST)

Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2

Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP

Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

#### Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

#### Media Access Protocol

CSMA/CA (Collision Avoidance) with ACK





## Technical Specifications

<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between Access Points
<b>Output Power</b> (for CCK and OFDM) <sup>2</sup>	17 dBm max
<b>Power Consumption</b>	Transmit: 2.4 Watts (max, with three spatial streams) Receive: 1.4 Watts (max with three spatial streams) Idle mode <sup>3</sup> : 35 mW (average) Radio off: 20 mW (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity</b> <sup>4</sup>	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
<b>Antenna Connections</b>	3 U.FL type connectors, 50 ohm nominal impedance
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.0075 lb (3.4 g)
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
<b>Operating Voltage</b>	3.3V +/- 9%
<b>Temperature</b>	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON
<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode and on battery power.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>	

<b>Intel Centrino Advanced-N 6200</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*  * In countries where 802.11n is not allowed, this capability is not enabled.
	<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP
	<b>Frequency Band</b>	2.4 GHz and 5GHz
	<b>Antenna Structure</b>	2 transmit; 2 receive (2x2)



### Technical Specifications

<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification	
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM	
<b>Security<sup>1</sup></b>	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST)  Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2  Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.	
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.	
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK	
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
<b>Roaming</b>	IEEE 802.11 compliant roaming between 2.4GHz band Access Points	
<b>Output Power</b> (for CCK and OFDM) <sup>2</sup>	17 dBm max	
<b>Power Consumption</b>	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode <sup>3</sup> : 35 mW (average) Radio off: 20 mW (max)	
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode	
<b>Receiver Sensitivity<sup>4</sup></b>	54 Mbps: -76 dBm, 6 Mbps: -92 dBm	
<b>Antenna Connections</b>	2 U.FL type connectors, 50 ohm nominal impedance	
<b>Form Factor</b>	PCI-Express Half-MiniCard	
<b>Weight</b>	0.0075 lb (3.4 g)	
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)	
<b>Operating Voltage</b>	3.3V +/- 9%	
<b>Temperature</b>	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>Configuration Utility<sup>5</sup></b>	Choice of Configuration Utility: Microsoft Windows XP	



### Technical Specifications

- Microsoft Windows XP Wireless Network Connection Manager
- Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)

#### Microsoft Windows Vista

- Microsoft Windows Vista Wireless Network Connection Manager.
- Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions.

#### LED Activity

LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

#### Broadcom 4312G 802.11b/g WiFi Adapter

#### Wireless LAN Standards

IEEE 802.11b  
IEEE 802.11g

#### Interoperability

Wi-Fi certified  
Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP

#### Frequency Band

2.4 GHz

#### Data Rates

802.11b: 1, 2, 5.5, 11 Mbps  
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

#### Modulation

Direct Sequence Spread Spectrum  
DBPSK, DQPSK, CCK, OFDM

#### Security<sup>1</sup>

Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.

Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

#### Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

#### Media Access Protocol

CSMA/CA (Collision Avoidance) with ACK

#### Network Architecture Models

Ad-hoc (Peer to Peer)  
Infrastructure (Access Point Required)

#### Roaming

IEEE 802.11 compliant roaming between access points

#### Output Power (for CCK)<sup>2</sup>

17 dBm , nominal

#### Output Power (for OFDM; power varies by data rate)<sup>2</sup>

15 dBm , nominal



### Technical Specifications

<b>Power Consumption</b>	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Operating Voltage</b>	3.3v +/- 10%
<b>Temperature</b>	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON
<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>	

Broadcom 43224AGN  
802.11a/b/g/n  
WiFi Adapter

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
<b>Interoperability</b>	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz and 5 GHz
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
<b>Frequency Support</b>	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands



### Technical Specifications

Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security <sup>1</sup>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) <sup>2</sup>	17 dBm , nominal
Output Power (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity <sup>3</sup>	270 Mbps: -61dBm , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3v +/- 10%
Temperature	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN



### Technical Specifications

supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

HP Integrated Module with Bluetooth 2.1 Wireless Technology	Bluetooth Specification	2.1 Compliant
	Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 264 mW
		Peak (Rx) 231 mW
		Sleep <1 mW
	Antenna	Internally integrated within module
	Range	Up 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant
		Microsoft Windows Plug and Play compliant
	Bluetooth Software Supported	Broadcom Bluetooth for Windows
		Microsoft Windows Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support
		Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
		Operating -4° to 158° F (-20° to 70° C)
		Non-operating -40° to 176° F (-40° to 80° C)
		Operating 10% to 90%
Humidity	Non-operating	5% to 95%
	Altitude	Operating 15,000 ft (4,572 m)
Altitude	Non-operating	40,000 ft (12,192 m)
	Bluetooth Profiles Supported	Serial Port Profile (SPP) <sup>1</sup>
		Service Discovery Application Profile (SDAP)
		Dial-Up Networking (DUN) <sup>1,2</sup>



## Technical Specifications

Generic Object Exchange Profile (GOEP)<sup>1,2</sup>  
 Object Push Profile (OPP)<sup>1,2</sup>  
 File Transfer Profile (FTP)  
 Synchronization Profile (SYNC)  
 Hard Copy Cable Replacement (HCRP)<sup>1,2</sup>  
 Personal Area Networking Profile (PAN)<sup>1,2</sup>  
 Human Interface Device Profile (HID)<sup>1,2,3</sup>  
 FAX Profile (FAX)  
 Basic Imaging Profile (BIP)<sup>2</sup>  
 Headset Profile (HSP)  
 Hands Free Profile (HFP)  
 Advanced Audio Distribution Profile (A2DP)

<sup>1</sup> indicates the profile is supported by Microsoft Windows XP SP2

<sup>2</sup> indicates the profile is part of Windows Vista

### Environmental Data

#### Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

#### Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	11.54 W	12.28 W	11.53 W
Sleep (Energy Star low power mode)	0.96 W	1.13 W	0.95 W
Off	0.67 W	0.82 W	0.66 W

#### Heat Dissipation\*

	115 VAC	230 VAC	100 VAC
Normal Operation	39 BTU/hr	42 BTU/hr	39 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

##### System Fan Off

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.5	26.4



### Technical Specifications

Fixed Disk  
(random writes)

3.6

26.4

System fan is usually off except when charging the battery

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:  
CR2032 (coin cell), Li-ion

6-cell high capacity Lithium-Ion battery (optional 8 cell available)

#### Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 90% recycle-able when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Paper 97 g
- Internal:
  - Polyethylene low density solid 13 g
  - Molded Pulp 100 g
  - Polyethylene low density 4 g
- The paper material is made from 80% recycled content.
- The Polyethylene low density solid is made from 100% recycled content.
- The Molded Pulp is made from 80% recycled content.
- The Polyethylene low density material is made from 4% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:





### Technical Specifications

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment"

([http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm<sup>2</sup>/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users. )

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide



## Technical Specifications

### Hewlett-Packard Corporate Environmental Information

treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

For more information about HP's commitment to the environment:  
Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

